



BLIZZARD

OPTICAL SORTER

**Interested in a free demonstration
with your own product or require
more information?**

Please contact us directly.

TOMRA Food EMEA

Research Park Haasrode 1622
Romeinse straat, 20
3001 Leuven
BELGIUM

Tel: +32 16 396 396
Fax: +32 16 396 390
food@tomra.com
www.tomra.com/food

TOMRA Food AMERICAS

875 Embarcadero Drive
West Sacramento
California 95605
U.S.A.

Tel: +1 916 388 3900
Fax: +1 916 388 3901
food.us@tomra.com
www.tomra.com/food

TOMRA Food APAC

Unit 1, 20 Anella Ave,
Castle Hill, 2154
NSW
AUSTRALIA

Tel: +61 2 8624 0100
Fax: +61 2 8624 0101
food.asia@tomra.com
www.tomra.com/food

TOMRA Food CHINA

1A/E, Rihua Building, No.8,
Xinfeng 2nd Road, Huli District,
Xiamen, Fujian, 361006
P.R.CHINA

Tel: +86 592 572 0780
Fax: +86 592 572 0779
food.china@tomra.com
www.tomra.com/food

The Blizzard free-fall pulsed LED camera sorting machine is the most ideal and cost effective optical sorting solution for the frozen fruit and vegetable processing industry. The Blizzard provides continuous food inspection to ensure food safety and customer satisfaction at all times by removing unwanted foreign material, misshapen product and discolorations, with maximum yield!

STABLE TECHNOLOGY


Pulsed LEDs with different wavelengths and specifically designed sensors ensure a reliable detection of **colour, shape and structural differences**. LEDs have a long life giving a consistent and reliable output, making the lighting system of the sorter virtually **maintenance and calibration free**. Also in the cold environments, the pulsed LEDs have the advantage of generating **little or no heat**.

MACHINE DESIGN AT ITS BEST

The small pitch system ensures an efficient removal of all defects at high capacity, providing a **high quality end product** while reducing labour costs and good product loss in order to **increase yield**. The Blizzard's open design facilitates the machine's sanitation and **maximizes its ease of use**. The electrical cabinet is placed at the rear end of the machine, again simplifying sanitation by making the machine **easily accessible**.

BENEFITS

- **Superior foreign material removal**
- **Shape sorting with extended shape toolbox**
- **Active LED background**
- **Glass and transparent foil detection**
- **User-friendly**
- **Low maintenance**
- **High capacity**
- **Designed to fit the output of IQF tunnels and packaging lines**

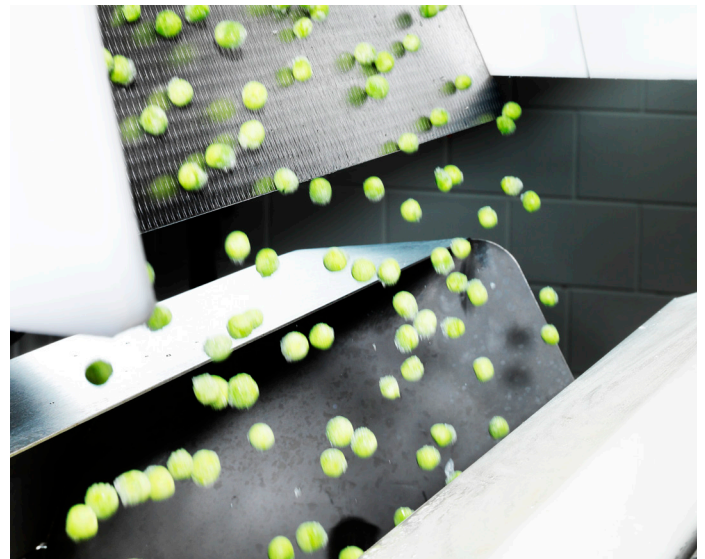

WORKING PRINCIPLE

An infeed shaker spreads the product uniformly over the free-fall chute. The produce is guided towards the inspection zone, where it is scanned by a specific set of different pulsed LEDs and a combination of cameras. A few milliseconds later the defects are hit by a precise, powerful burst of air sending them into the rejection zone while the good product continues its natural free-fall.

DIMENSIONS AND SPECIFICATIONS

Model	Dimensions				Utilities	
	Width	Length	Height	Infeed elevation	Power	Air
BLIZZARD 640	1870 mm (74")	2850 mm (112")	1933 mm (76")	1940 mm (76")	3 ph+N 3 kVa	87-102 psi 6-7 bar
BLIZZARD 1200	2445 mm (96")	2850 mm (112")	1933 mm (76")	1940 mm (76")	3 ph+N 3 kVa	87-102 psi 6-7 bar

*Information shown for reference and may change depending on the actual application.